

Attractive seamless flush facade
























KEY FEATURE:

- Different material options.
- Vast finish range.
- Various panel thickness options.
- Privacy lock with red/white indicator and provision for emergency access.
- Aluminium hardwares are polyester powder coated to match panel color.



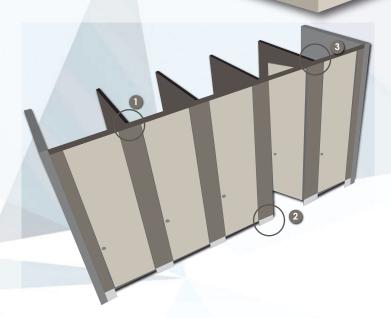

HARDWARE OPTION

- Top rail Extruded aluminium
- Floor support stainless steel skirting (Grade 316)
- 3 Wall / Divider Support (Grade 316)

SPECIFICATION:

Panel Thickness (nominal): 13mm Thick SGL panels

Divider Panels: 13mm Height: 2000mm

Depth/Width: According to layout

Door Opening: 700mm

Bottom Clearance: 50mm - 150mm

MATERIAL:

SGL: (Solid grade compact laminate) available in wide range of colors as well as in digital prints.

HPL: (High pressure laminate) its heat, moisture, scratch and impact resistant HPL faced panels, with matching edge banding along with different surface options.

SANDWICH PANEL: 25 to 32mm thick sandwich panel having compact laminate faces on both the sides.

STANDARD S.S. HARDWARE (GRADE 316):



